



Applications

Unrivalled flexible wall-hung WC pan support frame designed for use against flat walls and in corners.
Ideal for most domestic and commercial applications.

Water Saving


- ~ Provides 6/4 litre dualflush and quickly and easily converts before or after installation to 5/3 or 4/2.6 litre dualflush
- ~ Delay fill Hydroflo inlet valve only allows cistern to start refilling once flushing is complete, saving up to 0.5L of drinking water per flush
- ~ European Water Label Scheme registered
- ~ Supports BREEAM.

Features

- ~ Unique design enables frame height to be set between 820mm and 1078mm for unrivalled installation flexibility
- ~ Height adjustable
- ~ Legs adjust to offer WC pan height fixing flexibility
- ~ Wall and floor fixing brackets can be fixed through 180° and 360° respectively to provide further flexibility
- ~ Strong steel square hollow construction
- ~ Blue powder coated finish and zinc plated wall and floor brackets
- ~ Flushbend and WC pan connector clamps
- ~ Integral factory fitted Dudley Vantage
- ~ 5L & 4L mono flush is achievable

Technical Data

Operation	Pneumatic [Vantage]
Pneumatic tube length	750mm
Inlet	Side
Outlet	Valve
Fixing Orientation	Wall and floor fixed
Height Adjustment	MIN. 820mm - MAX. 1078mm
Load Capacity	Tested to 4kN
Product Code	325685 Vantage DF Cistern, Button/ Plate operated - no Button/Plate (With Jacket) 325686 Vantage DF Cistern, Button/ Plate operated - no Button/Plate (No Jacket)

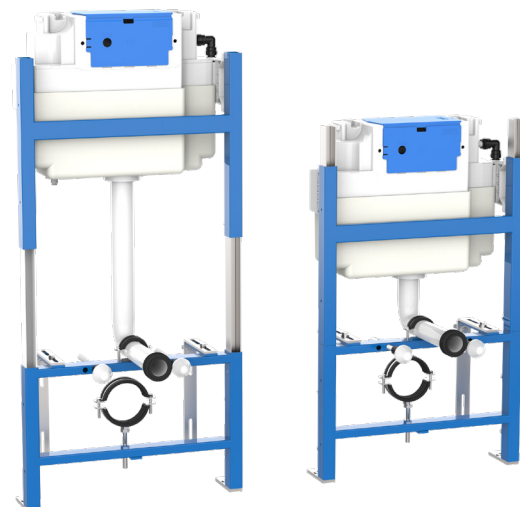

Dimensional Data

