


Geberit Mapress Copper reducer with plain end

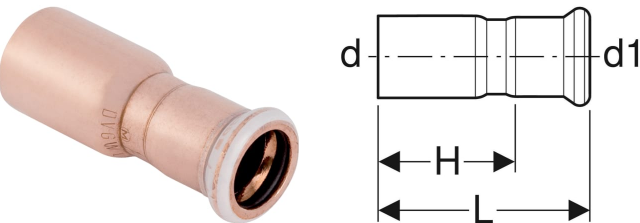

APPLICATION PURPOSES

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water and process water
- For compressed air (oil purity class 0–3)
- For negative pressure

- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

CHARACTERISTICS

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Concentric
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm

- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

TECHNICAL DATA

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, $\varnothing$ mm	d1, $\varnothing$ mm	L cm	H cm
62305	20 / 12	22	15	5.9	3.9