


Geberit Mapress Copper adaptor union with male thread

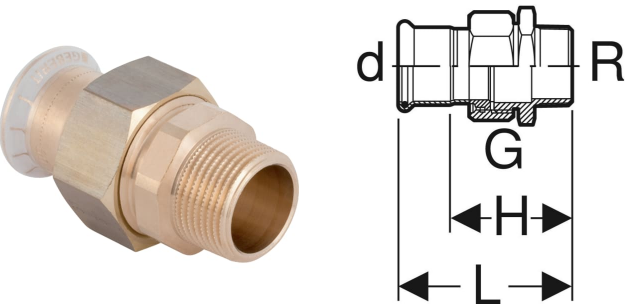

APPLICATION PURPOSES

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water and process water
- For compressed air (oil purity class 0–3)
- For negative pressure

- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

CHARACTERISTICS

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black

TECHNICAL DATA

Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø mm	R "	G "	L cm	H cm
65543	20	22	3/4	1	6.8	4.7