

AQUALISA


QUARTZ BLUE™

DUAL OUTLET CONCEALED


QZSB.A1.BV.
DVBTX.23

WITH ADJUSTABLE HEAD
AND BATH OVERFLOW FILLER - HP/COMBI


DIMENSIONAL DRAWINGS

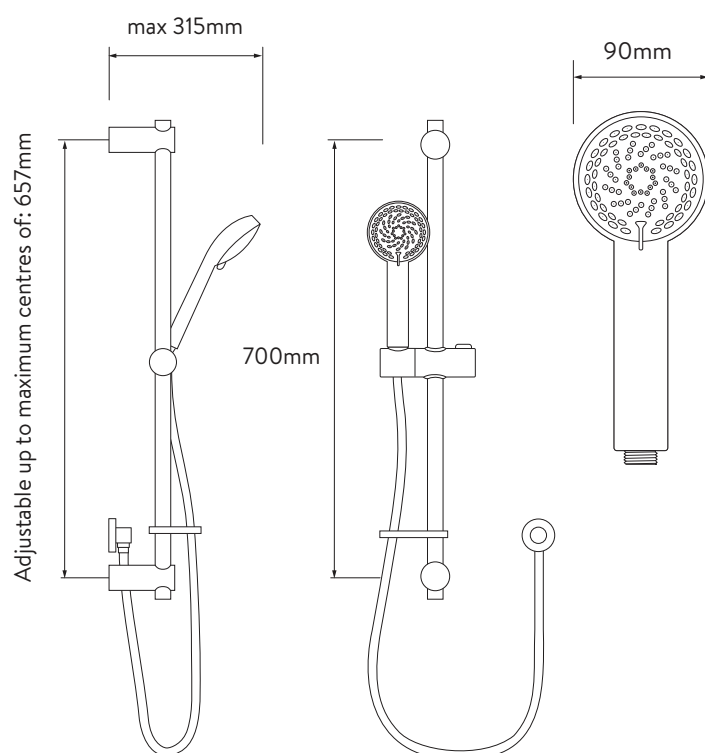



CONTROLLER

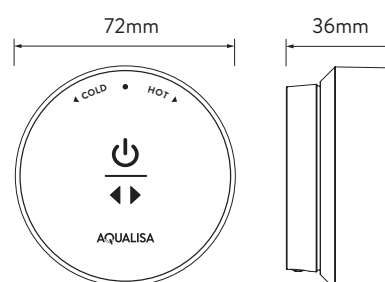

AQUALISA SMARTVALVE™

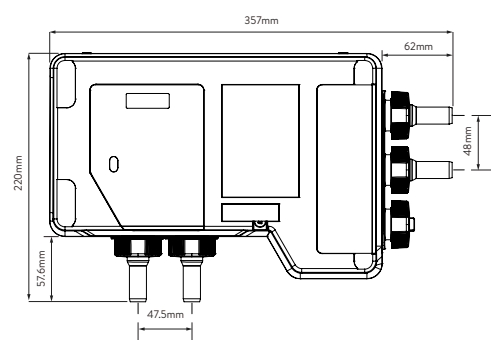

BATH OVERFLOW FILLER



AQUALISA

QUARTZ BLUE™

DUAL OUTLET CONCEALED

QZSB.A1.BV.
DVBTX.23

WITH ADJUSTABLE HEAD
AND BATH OVERFLOW FILLER - HP/COMBI

TECHNICAL SPECIFICATIONS

Minimum operating pressure	1 bar
Maximum operating pressure	5 bar
Peak operating pressure	7 bar
Aqualisa SmartValve™ inlet fitting connections	15mm push fit
Valve inlet centres	48mm
Inlet supply positions	Hot right, cold left
Aqualisa SmartValve™ outlet fitting connection	15mm push fit
Permissible Aqualisa SmartValve™ siting location	Loft, airing cupboard, under bath
Supply temperature	Cold inlet temperature 1°C (minimum) Cold inlet temperature 15°C (maximum) Hot inlet temperature 65°C (maximum)
Water system	HP / Combi / Boosted gravity
Features	One touch start/stop control
	LED display indicates when pre-selected temperature has been reached
	On installation, you can select the shower outlet you want to start first every time
	Wi-Fi & App compatible – control your product with your smart phone and smart home device e.g. Alexa, Google
	App functions include start/stop, shower timer, user dashboard, usage tracker and help & support
	Aqualisa SmartValve™
	Digital diverter technology
	90mm, 4 spray patterns (adjustable head) including eco-spray option
Colour	Chrome
Guarantee period	5-year guarantee – shower unit
	2-year guarantee – shower head and kit
Approvals	CE Marking
	UKCA
	BEAB