

CRZ2 SHXDIVCTFF C

SAFETOUCH Shower Range

Craze2 Adjustable Rigid Riser
Diverter Bar Shower



Features:

- Unique Safe Touch technology ensures the bar valve stays cool to the touch while in use.
- Dual control - Flow and temperature are controlled separately giving accurate control of both.
- Factory set to a maximum of 38°C to eliminate the ability to select an unsafe temperature, can be adjusted up to a maximum of 43°C.
- Supplied with WMNT12 C Isolation fast fit connections.
- Supplied with 1.5m hose, height adjustable riser rail, hose retainer and multi function handset with rub clean nozzles.

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bar Shower
Main Construction Material:	Zinc Alloy; Stainless Steel; ABS
Connection Inlet:	1/2" Compression
Connection Outlet:	G 1/2" & Riser Outlet
Number of Controls:	2
Flow Control Valve Type:	25mm Cartridge
Plumbing System:	Suitable for high pressure systems
Minimum Dynamic Pressure: (Bar)	1.0
Maximum Dynamic Pressure: (Bar)	5.0
Maximum Static Pressure: (Bar)	10
Maximum Hot Water Temperature: (°C)	80
Pre-set Outlet Temperature: (°C)	38
Isolation Included:	Yes
Check Valve Supplied:	Yes
Shower Kit:	Adjustable Rigid Riser Shower Kit

Dimensions (measurements in mm)

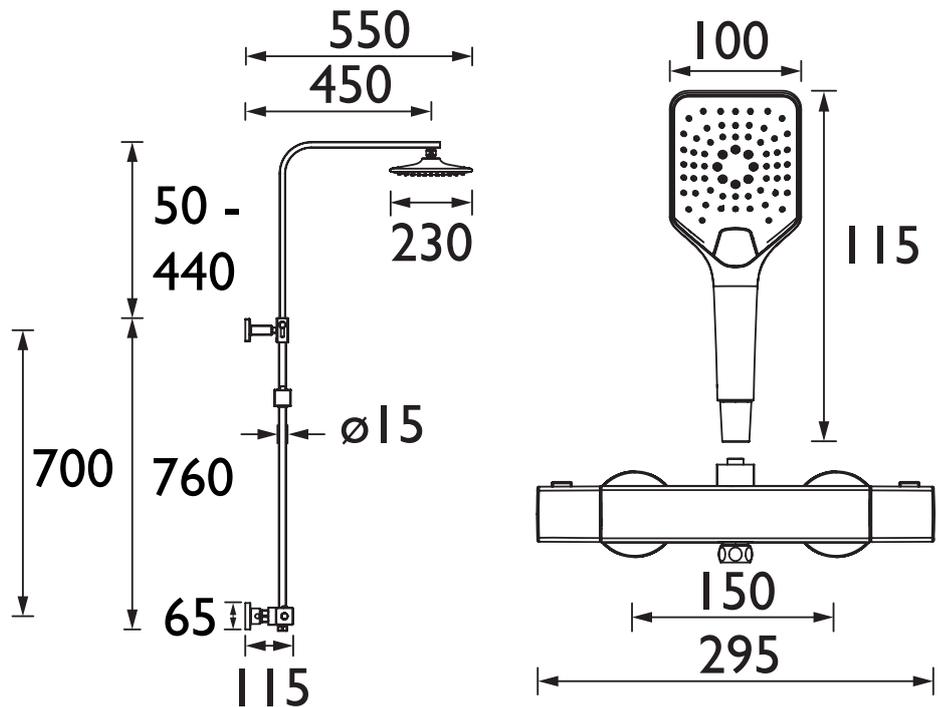

Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
Through Handset (mixed)	5.5	7.8	9.6	10.8	11.8
Through Fixed Head (mixed)	5.8	8.7	10.2	11.5	12.5

TECHNICAL
DATA
SHEET



BRISTAN

D9