

# ST PUMP20TN

Accessories  
2.0 Bar Twin Ended Shower Pump Powered By  
Stuart Turner



## Specification

<b>Pump Type:</b>	Single Speed Twin Impeller
<b>Power Supply:</b>	230 Volts AC
<b>Power Consumption:</b>	420 Watts
<b>Inlet Connections:</b>	Flexible hose - 15mm push fit
<b>Outlet Connections:</b>	Flexible hose - 15mm push fit
<b>Supply:</b>	Suitable for gravity fed systems only
<b>Max Inlet Head:</b>	10 Meters
<b>Max. Head (closed valve):</b>	19 Meters
<b>Motor Rating:</b>	30 minutes on, 30 minutes off
<b>Max. Working Pressure:</b>	3.0 Bar
<b>Pump Rating:</b>	2 Bar / 35 LPM
<b>Max. Inlet Water Temperature:</b>	65°C

## Features:

- Twin impeller for boosting two water supplies
- Fully automatic flow switch control - pump automatically starts when flow of water exceed 0.8 litres per min.
- High boost performance
- Low noise - fitted with anti-vibration feet.
- Min. inlet water temperature - 4°C
- Max. inlet water temperature - 65°C
- Max. number of starts per hour - 60
- Max. ambient air temperature - 40°C

## Product Certifications:




WRAS Cert. Number: 2007386  
WRAS Expiry Date: 31/07/2025

For more products, visit our website:  
<http://www.bristan.com>



## Dimensions (measurements in mm)

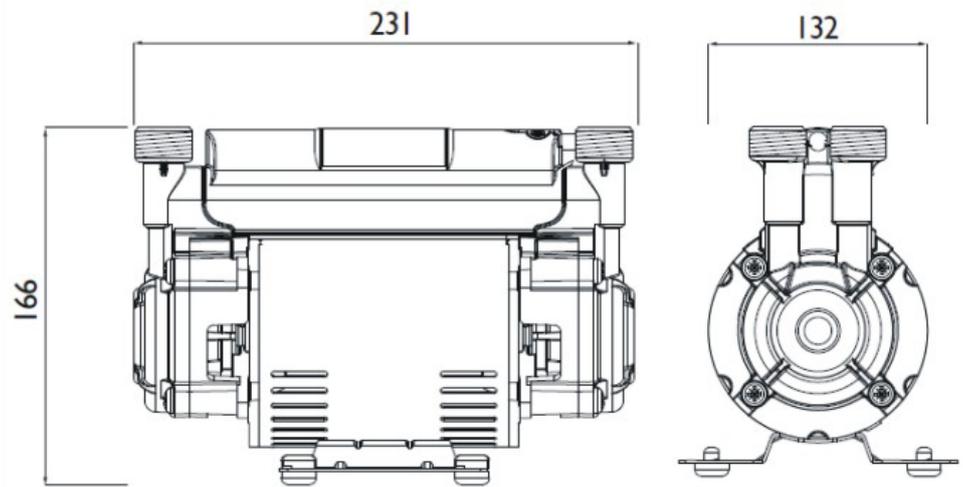

TECHNICAL  
DATA  
SHEET



BRISTAN

D3