


# AQUALISA®

## E2 AQUALISA ELECTRIC


WHITE – 9.5KW ELECTRIC SHOWER

E2W95

### DIMENSIONAL DRAWINGS

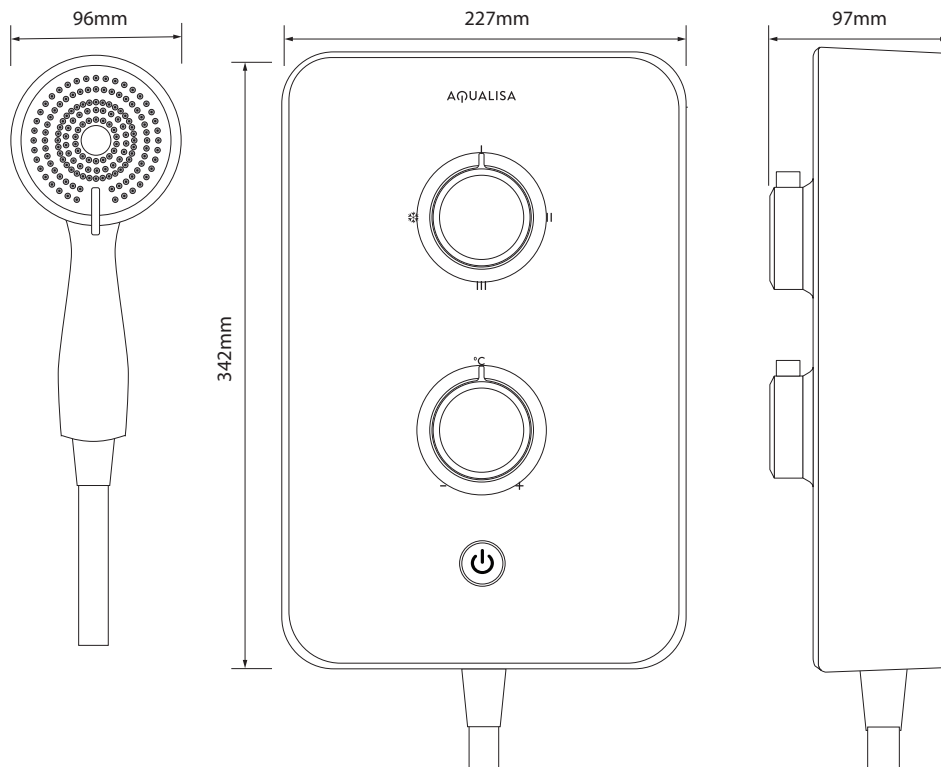

### CONNECTIONS

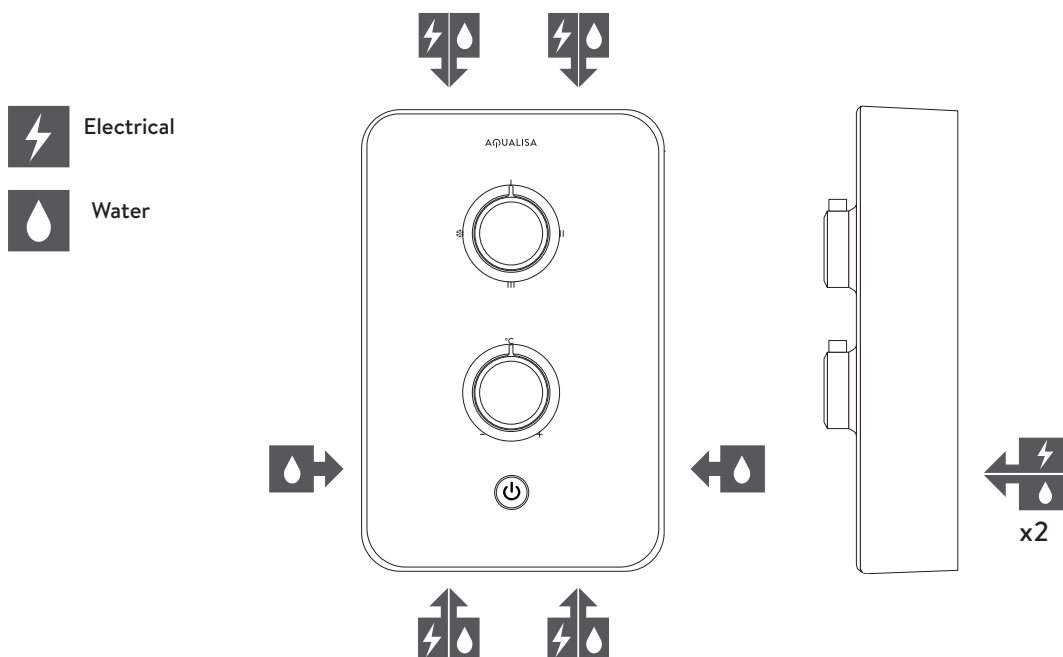

AQUALISA®

E2 AQUALISA ELECTRIC

WHITE – 9.5KW ELECTRIC SHOWER



TECHNICAL SPECIFICATIONS

Power	9.5kW
Minimum pressure requirements	1 bar
Maximum pressure requirements	10 bar
Water entry points	Right and left – top, bottom, side and rear
Cable entry points	Right and left – top, bottom and rear
Inlet fitting connections	15mm push fit, 15mm compression
Outlet fitting connections	1/2" BSP thread
Supply temperature	Mains Cold Supply Only 5 – 25°C
Electric requirements	Supply voltage 230 – 240V
Water system	Mains cold system
Features	3 power settings
	Push button start/stop
	Temperature control
	Adjustable stainless steel rail
	Multimode handset
Colour	White
Guarantee period	Shower Unit 2 year guarantee
	Shower Head and Kit 2 year guarantee
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive