

# The most hygienic WAY TO FLUSH!

FLUSH

TOUCHLESS

Suitable for close coupled and low-level ceramic cisterns.

## BENEFITS



### 100% HYGIENIC

Touchless infrared detection button.



### WATER SAVING

Water Volume Control.



### QUICK & EASY TO INSTALL AND MAINTAIN

No height adjustment compensates misalignment between lid hole and tank. Cable operated system.



### PROVEN PERFORMANCE

Endurance tested to 200,000 flush cycles.



**wirquin**

# TOUCHLESS

**wirquin**  
Innovation

## LONGLASTING

TOUCHLESS has a battery lifespan of 40,000 flush cycles (more than 5 years at the rate of 20 flushes/day). The TOUCHLESS button works with x4 AA alkaline batteries.

Thanks to its motion activated infrared mechanism, any contact with the flush button can be avoided, making the TOUCHLESS a great hygienic option. The user can control the volume of water being used to flush with a quick hand wave activating half a flush, and a handheld over the button for 4 seconds activating a full 6L flush. In the rare occasion of battery failure, a manual override is available. The cable operated button allows for easy installation and can easily be adjusted to the height of the cistern.



## 100% HYGIENIC



## WATER SAVING




## QUICK & EASY TO INSTALL AND MAINTAIN



## BUTTON IR DETECTION OR MANUAL ACTIVATION IF NEEDED



## ENDURANCE TESTED TO 200,000 FLUSH CYCLES

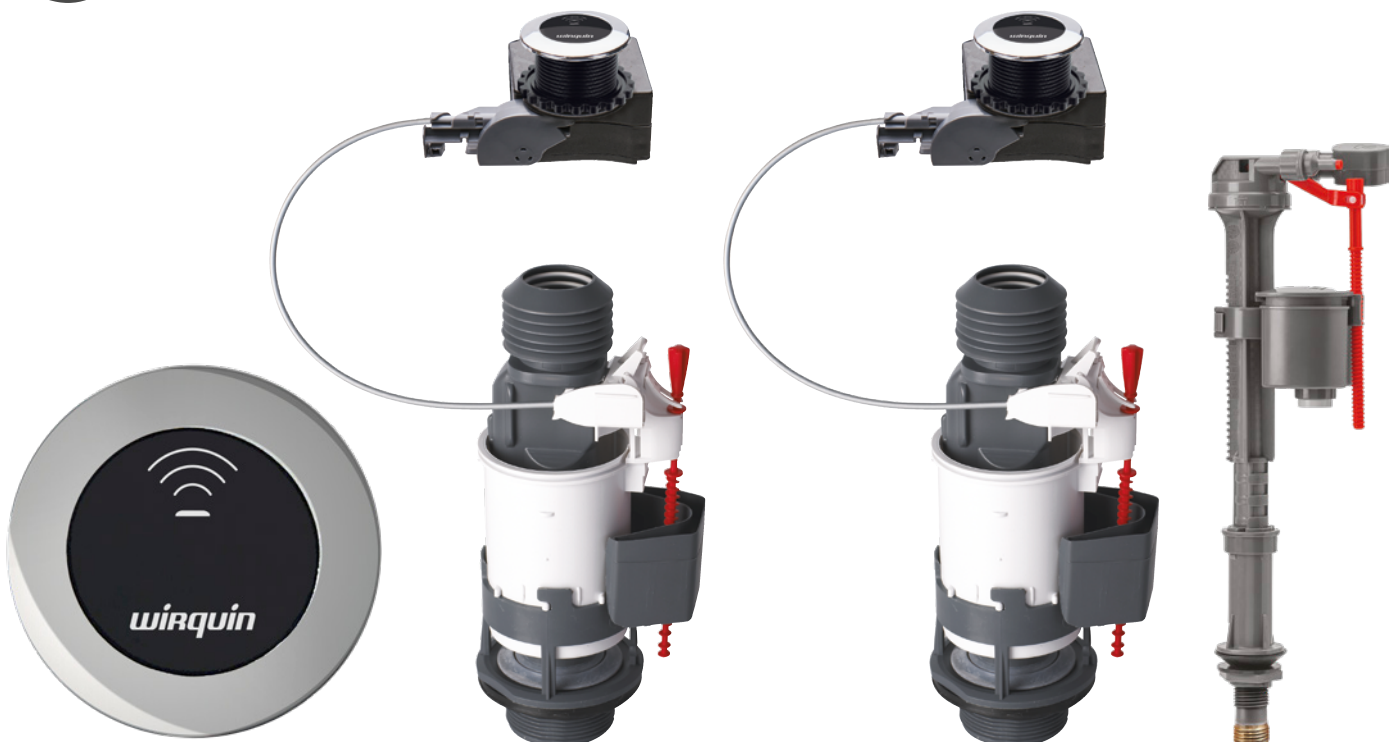

# TOUCHLESS

The TOUCHLESS operates without contact thanks to its infrared sensor which detects the slightest movement. TOUCHLESS is the 100% hygienic solution and guarantees effective protection against germs, bacteria and viruses.



## CHARACTERISTICS

Touchless  
Adjustable


Positioning of button: Top  
Length of cable: 300 mm

Height of cistern min.: 320 mm  
Height of cistern max.: 420 mm

Lid hole diameter min: 38 mm  
Lid hole diameter max: 45 mm

Base diameter: 1.5" - 2"

Adjustment of the overflow: Telescopic  
Height of the overflow min.: 185 mm  
Height of the overflow max.: 230 mm

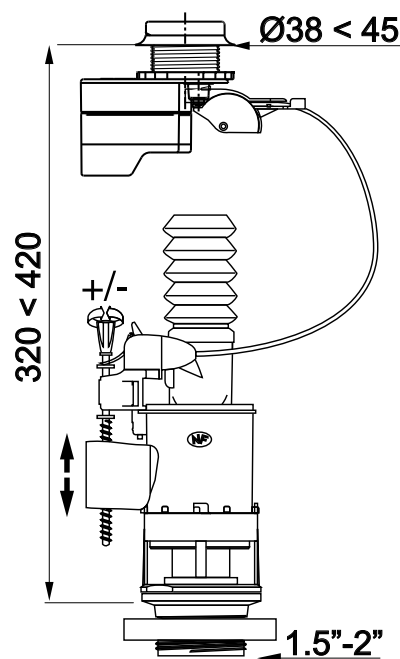

## CARE AND CLEANING

It is recommended to service the flush valve every 5 years. To do so, remove the flush valve by turning 1/4 turn, remove the sealing washer and clean with soapy water before repositioning. Do not use cleaning products or drain cleaners that contain bleach, acid, or harsh chemicals.

## QUALITY

Longlasting: 5 year life span with 4 AA alkaline batteries. 10 year Warranty on mechanism.

## TIPS

The dual flush mechanism is set to 3 litres for a small flush and 6 litres for a full flush, saving up to 40,000L per year (based on a family of 4).

# TOUCHLESS

## *The most hygienic way to flush*



Product name	Reference	EAN code	Packaging	Single	Box Qty	Pallet Qty
TOUCHLESS Flush Valve & Sensor	10950189	6425366005713	BOX	1	8	160
TOUCHLESS FLUSHING KIT With Jollyfill Air Telescopic Inlet Valve	10950190	6425366005720	BOX	1	6	120

Please contact our office to discuss your ordering terms.



**ORDER  
NOW**

**Speak to our sales team**  
tel: +44(0) 333 222 4488  
email: [sales@wirquin.co.uk](mailto:sales@wirquin.co.uk)

[www.wirquin.co.uk](http://www.wirquin.co.uk)

**wirquin**