OPS BAS C

OPUS Tap Range Opus Basin Mixer with Clicker Waste Chrome



Features:

- A hard-wearing, flawless chrome finish that lasts for years
- Long life ceramic cartridge for added durability and ease of use
- All in one box Includes flexible tails and clicker waste so nothing to buy separately
- Supplied with metal fixing nut to secure your tap in place
- Suitable for high and low pressure water systems

Product Certifications:



WRAS Cert. Number: 1907937 WRAS Expiry Date: 31/07/2024






For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handle			
Connection Inlet:	1/2" BSP Flexible Tails			
Connection Outlet:	M24 Aerator			
Number of Tap Holes:	1			
Valve/Cartridge Type:	35mm Single Lever Cartridge			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Dimensions (measurements in mm)

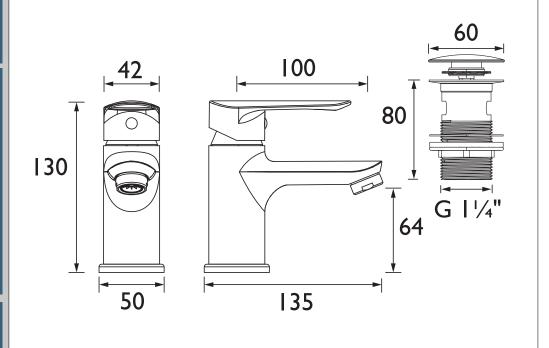

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
OPS BAS C (mixed)	4	6.7	9.6	13.7	16.8	21.9		

TECHNICAL DATA SHEET



