


Geberit Mapress Copper reducer with plain end

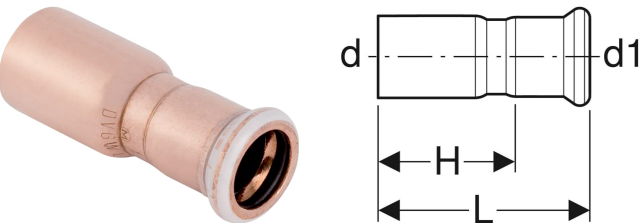

APPLICATION PURPOSES

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water and process water
- For compressed air (oil purity class 0–3)
- For negative pressure

- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

CHARACTERISTICS

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Concentric
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm

- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

TECHNICAL DATA

| | |
|------------------|--------------------------------|
| Product material | Cu-DHP copper CW024A (EN 1412) |
|------------------|--------------------------------|

| Art. no. | DN | d, \varnothing mm | d1, \varnothing mm | L cm | H cm |
|----------|---------|---------------------|----------------------|------|------|
| 62313 | 32 / 25 | 35 | 28 | 6.8 | 4.5 |