

# Sanicubic 1 VX

## Grey water, black water

Sanicubic 1 VX is a lifting station with one vortex pump. It is designed for lifting waste water from houses or small commercial premises. Sanicubic 1 VX has direct and safe access to the motor and level sensors. The lifting station comes with a classic control box and a wired alarm.



### PERFORMANCE

- Total head: 13 m
- Max. flow rate: 40 m<sup>3</sup>/h


### PRODUCT BENEFITS

- Floor standing for easy installation
- Easy access for maintenance
- 3 inlets
- Vortex technology
- Direct and safe access to the motor
- Comes with classic control box
- Comes with wired alarm



### DELIVERED AS STANDARD


Classic control box



Remote wired audible and visual alarm unit (5m)



### CONNECTIONS




- ➡ External inlet diameter: 40/50/100/110/125 mm
- ➡ External discharge diameter: 90/110 mm
- ↔ External ventilation diameter: 75 mm




vortex

## DIMENSIONS

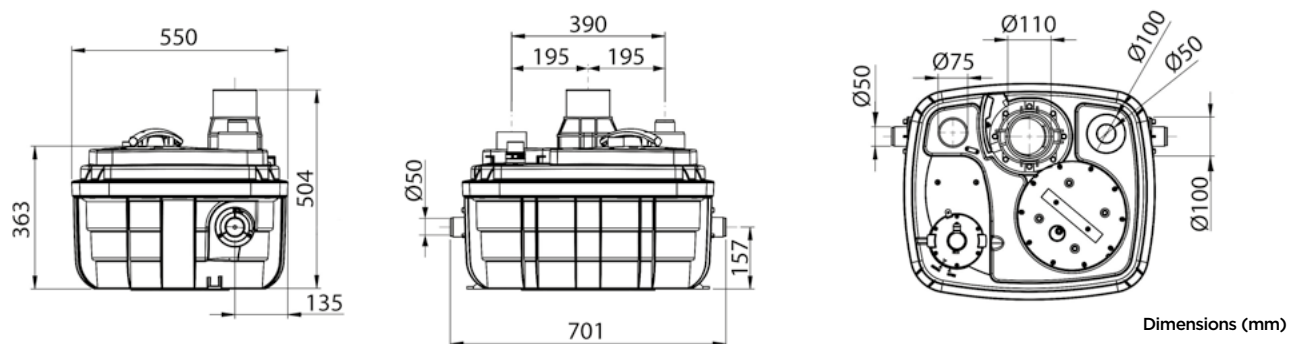

## CURVE

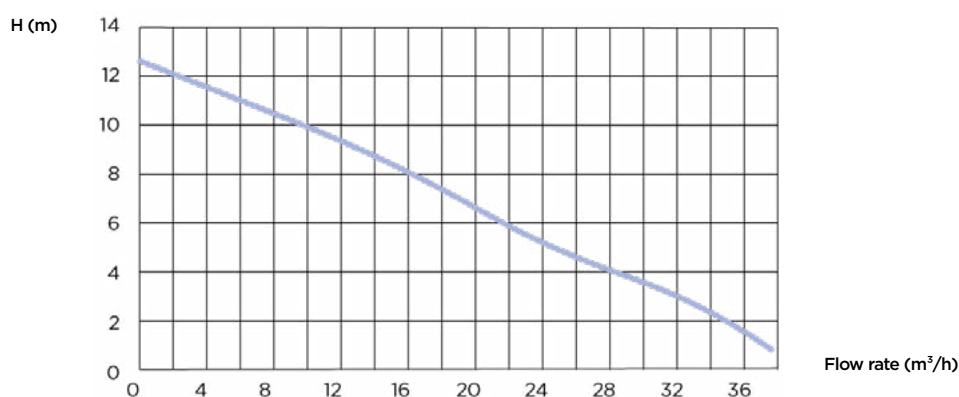

	Sanicubic 1 VX
Type of control box	Classic
Material	
Tank	PP GF
Pump housing	PA 12 GF
Motor housing	PA 12 GF
Impeller	PPO GF
Electrical features	
Voltage (V)	230
Power consumption P1 (W)	2000
Power output P2 (W)	1400
Mode of operation	S3 15%
IP rating	IP68
Hydraulics	
Total head (m)	13
Max. flow rate (m³/h)	40
External inlet diameter (mm)	40/50/100/110/125
External discharge diameter (mm)	90/110
External ventilation diameter (mm)	75
Total volume (L)	60
Useable volume (L)	21
ON level /OFF level (mm)	165/95
Alarm level (mm)	235
Particle size (mm)	50
Max. temperature of the pumped liquid (5 min)	70°C
Type of impeller	vortex
Type of activation	pneumatic
Identification and logistics	
Gross weight (kg)	30
Barcode	3308815077611
Product code	30005